

Suzhou Pineapple Health Technology Co., Ltd.

TEST REPORT

SCOPE OF WORK:

FCC Part 15 subpart B – EMC report

Model:

BOOSTER P2 PRO

REPORT NUMBER

190501222SHA-001

ISSUE DATE

May 14, 2019

DOCUMENT CONTROL NUMBER

TTRFFCCPART15b_V1

© 2018 Intertek



Applicant : Suzhou Pineapple Health Technology Co., Ltd.
No. 1, Guantang Road, Xiangcheng District, Suzhou, Jiangsu, China

Manufacturer : Same as applicant

Manufacturing site : Same as applicant

Summary

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2017): Radio Frequency Devices (Subpart B)

ANSI C63.4 (2014): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

PREPARED BY:

REVIEWED BY:

Star Guo
Project Engineer

Andy Chen
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Contents

REVISION HISTORY	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST FACILITY	7
2 TEST SPECIFICATIONS	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST.....	8
2.3 TEST SOFTWARE LIST	8
2.4 TEST PERIPHERALS LIST	8
2.5 RECORD OF CLIMATIC CONDITIONS	8
2.6 INSTRUMENT LIST	9
2.7 MEASUREMENT UNCERTAINTY	10
3 CONDUCTED EMISSION	11
3.1 LIMITS.....	11
3.1.1 <i>Limits for conducted emission of class A device</i>	11
3.1.2 <i>Limits for conducted emission of class B device</i>	11
3.2 TEST SETUP	12
3.3 TEST SETUP AND TEST PROCEDURE	13
3.4 TEST PROTOCOL.....	14
4 RADIATED EMISSION	16
4.1 RADIATED EMISSION LIMITS	16
4.1.1 <i>Limits for radiated emission of class A device</i>	16
4.1.2 <i>Limits for radiated emission of class B device</i>	16
4.2 BLOCK DIAGRAM AND TEST SET UP	17
4.3 TEST SETUP AND TEST PROCEDURE	18
4.4 TEST PROTOCOL.....	19
APPENDIX I: PHOTOGRAPH OF TEST SETUP	23
APPENDIX II: PHOTOGRAPH OF EQUIPMENT UNDER TEST	24

Revision History

Report No.	Version	Description	Issued Date
190501222SHA-001	Rev. 01	Initial issue of report	May 14, 2019

DRAFT

Measurement result summary

TEST ITEM	FCC REFERANCE	TEST RESULT	NOTE
Conducted emission	15.107	Pass	
Radiation emission	15.109	Pass	

Notes: 1: NA =Not Applicable

2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

DRAFT

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product Name : Hand held massager
Type/Model : BOOSTER P2 PRO
Description of EUT : One model was tested, and listed the worst data.
Rating : Power adapter:
Input: 100-240V, 50/60Hz,
Output: 24VDC, 1A; Class II
Massager: 24VDC, 1A
Brand name : BOLUOJUN
Category of EUT : Class B
EUT type : Table top
 Floor standing
Sample received date : May 10, 2019
Sample identification No. : 0190429-06
Date of test : May 10-13, 2019

1.2 Description of Test Facility

Name : Intertek Testing Services Shanghai
Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R.
China
Telephone : 86 21 61278200
Telefax : 86 21 54262353

The test facility is : CNAS Accreditation Lab
recognized, certified, Registration No. CNAS L0139
or accredited by these FCC Accredited Lab
organizations Designation Number: CN1175
IC Registration Lab
CAB identifier.: CN0051
VCCI Registration Lab
Registration No.: R-14243, G-10845, C-14723, T-12252
A2LA Accreditation Lab
Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2017): Radio Frequency Device: Subpart B

ANSI C63.4 (2014): Interim Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz.

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency is specified if used.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description

2.5 Record of climatic conditions

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)
Conducted emission	24	42	101
Radiated Emission	24	42	101

Notes: NA =Not Applicable

2.6 Instrument list

Conducted Emission / Disturbance Power / Tri-loop Test / CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2019-07-15
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2019-12-07
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2020-01-07
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2019-09-11
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2019-06-10
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2019-07-31
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3326	2020-03-28
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2020-02-28
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2019-07-01

2.7 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted emission at mains ports	9kHz ~ 150kHz	3.71 dB
	150kHz ~ 30MHz	3.31 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.04 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.97 dB
	6GHz ~ 18GHz	5.29 dB

DRAFT

3 Conducted emission

Test result: **PASS**

3.1 Limits

3.1.1 Limits for conducted emission of class A device

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.


3.1.2 Limits for conducted emission of class B device

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz
2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

3.2 Test setup

For table top equipment

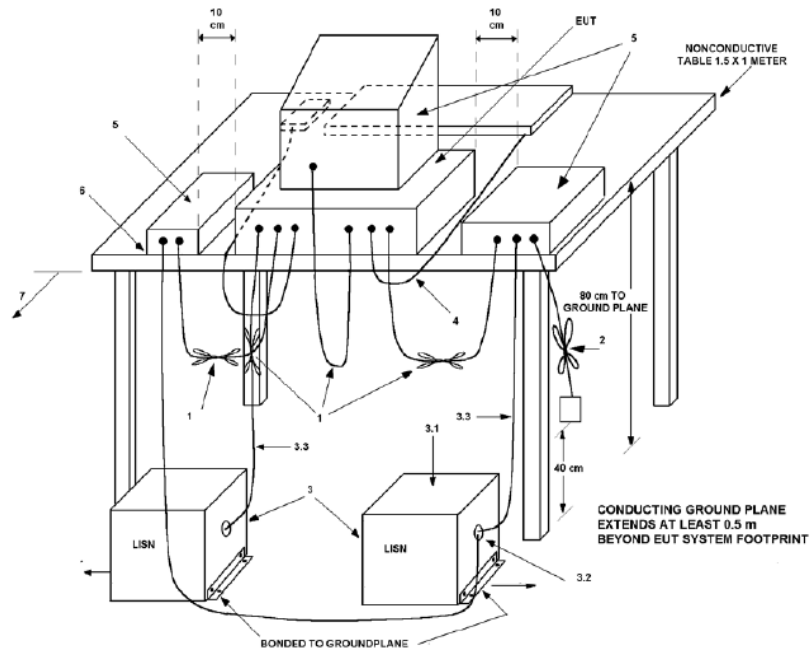

For floor standing equipment

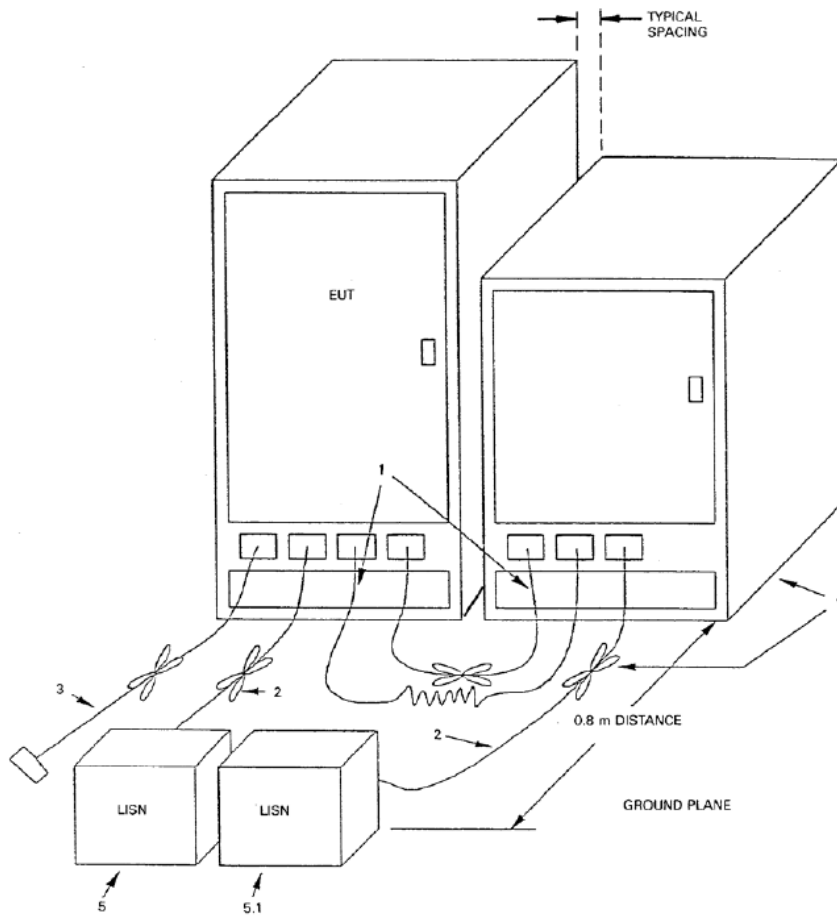

3.3 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were following clause 4 and clause 5 of ANSI 63.4.

Detailed test procedure was following clause 7.3 of ANSI 63.4.

EUT arrangement and operation conditions were according to clause 6 and clause 7 of ANSI 63.4.


Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

DRAFT

3.4 Test Protocol

Charging mode

L line:

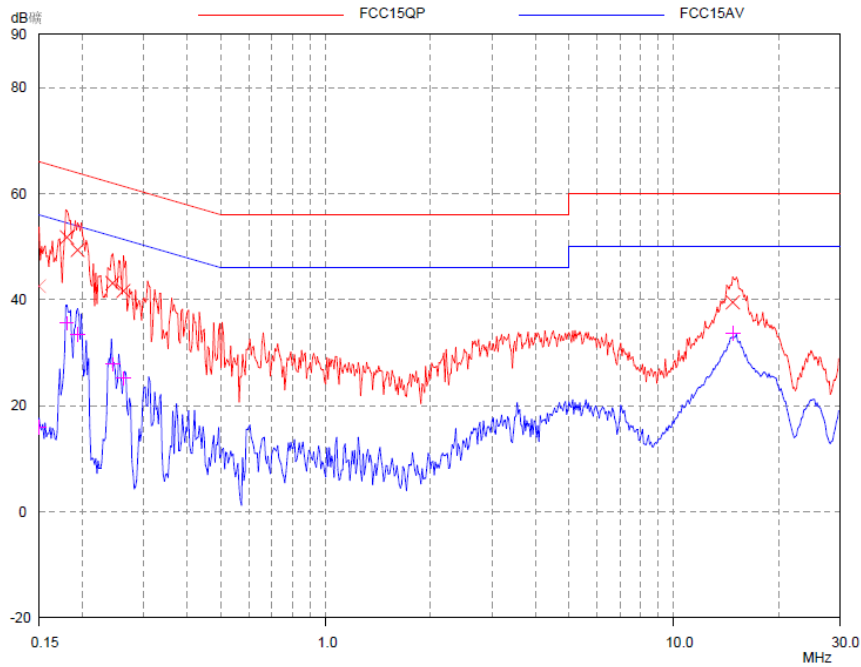


Final Measurement Results

Frequency MHz	QP Level dB	QP Limit dB	QP Delta dB
0.15	42.54	66.00	23.46
0.18017	51.75	64.48	12.73
0.19356	49.34	63.88	14.54
0.24388	43.11	61.96	18.85
0.26201	41.66	61.37	19.71
14.76922	39.50	60.00	20.50

Frequency MHz	AV Level dB	AV Limit dB	AV Delta dB
0.15	15.94	56.00	40.06
0.18017	35.53	54.48	18.95
0.19356	33.48	53.88	20.40
0.24388	27.78	51.96	24.18
0.26201	25.15	51.37	26.22
14.76922	33.65	50.00	16.35

N line:

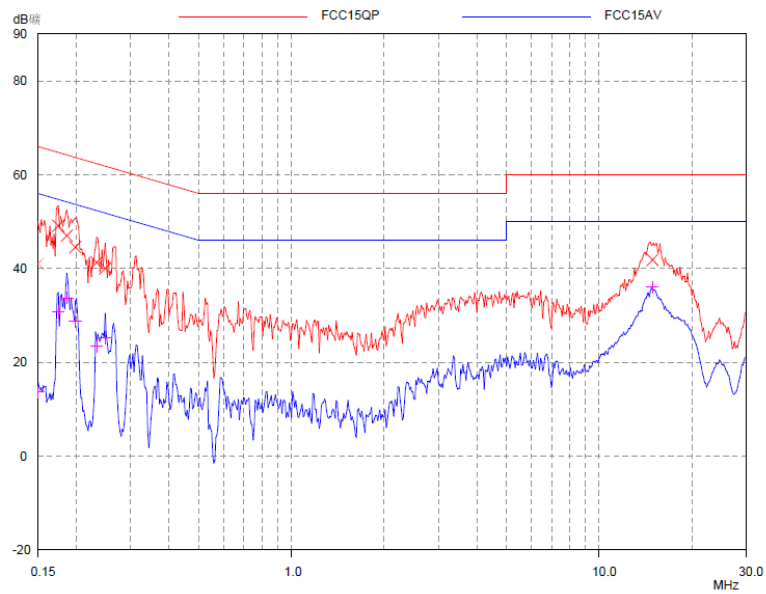

Final Measurement Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB
0.15	41.07	66.00	24.93
0.17451	49.11	64.74	15.63
0.186	47.01	64.21	17.20
0.19824	44.59	63.68	19.09
0.23249	41.29	62.36	21.07
0.2478	40.03	61.83	21.80
14.88738	41.86	60.00	18.14

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.15	13.64	56.00	42.36
0.17451	30.77	54.74	23.97
0.186	33.73	54.21	20.48
0.19824	28.68	53.68	25.00
0.23249	23.49	52.36	28.87
0.2478	25.29	51.83	26.54
14.88738	35.98	50.00	14.02

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
Then Correct Factor = 10.00 + 2.00 = 12.00dB;
Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;
Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

4 Radiated emission

Test result: **PASS**

4.1 Radiated emission limits

4.1.1 Limits for radiated emission of class A device

Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 10m
30 ~ 88	39
88 ~ 216	43.5
216 ~ 960	46.4
Above 960	49.5

Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.


4.1.2 Limits for radiated emission of class B device

Frequency (MHz)	Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 3m
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
Above 960	54.0


Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.

4.2 Block diagram and test set up

For table top equipment

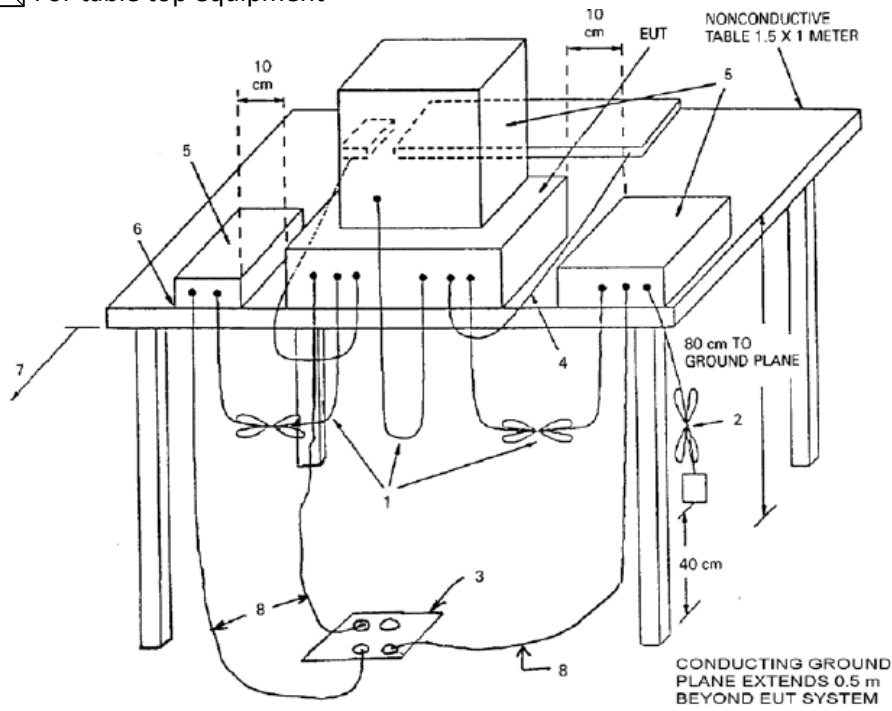

For floor standing equipment

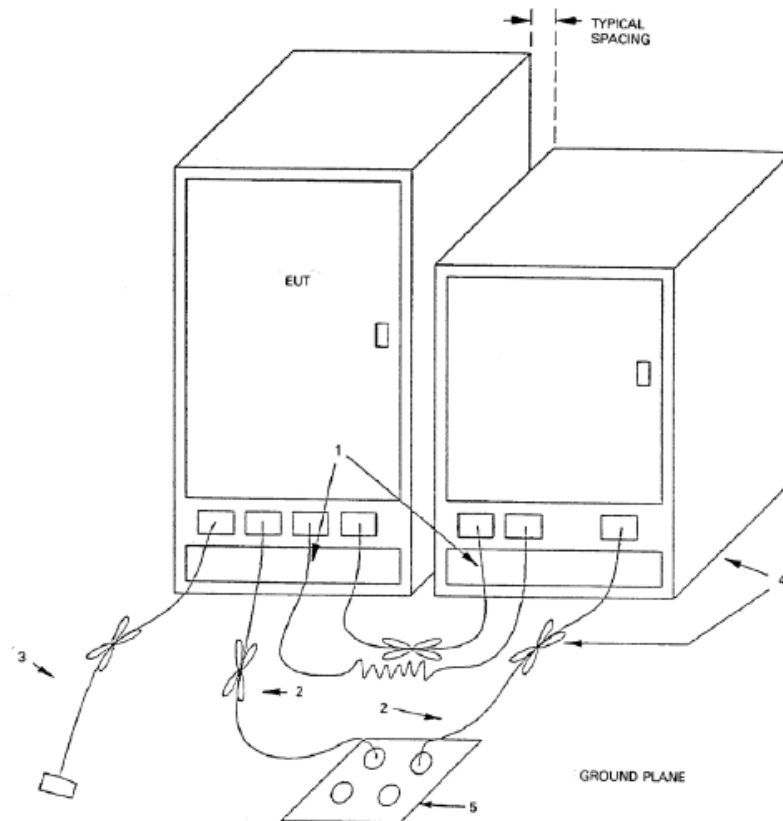

4.3 Test Setup and Test Procedure

The measurement was performed in a semi-anechoic chamber.

The distance from EUT to receiving antenna is 3 meter.

Measurement was performed according to clause 4 and clause 5 of ANSI 63.4.

Test procedure was according to clause 8.3 of ANSI 63.4.

EUT arrangement and operate condition were according to clause 6 and clause 8 of ANSI 63.4.

The bandwidth setting on R&S Test Receiver was 120 kHz.


The required measurement frequency range was checked.

DRAFT

4.4 Test Protocol


Test Curve:
Charging mode

Horizontal

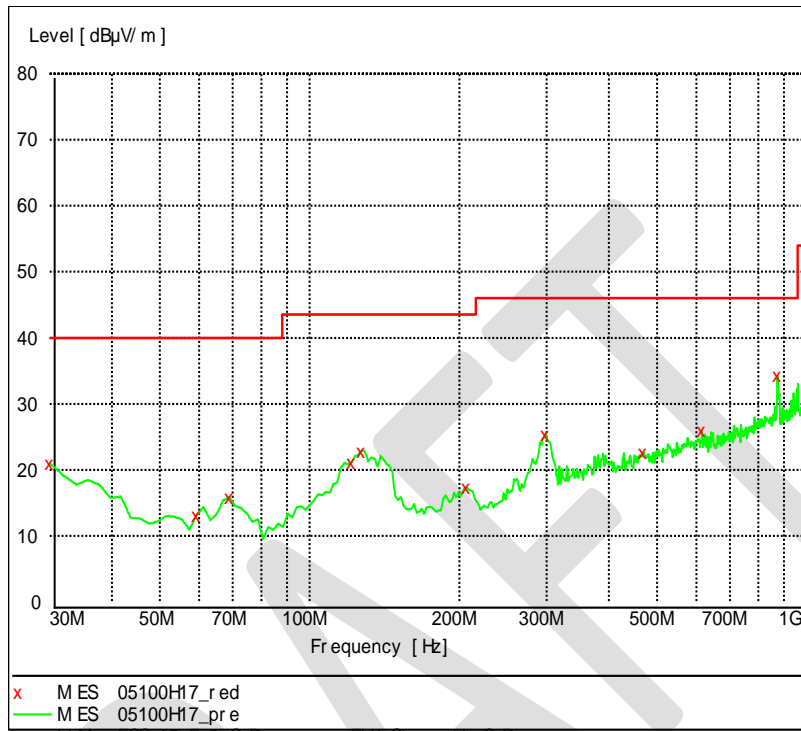

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB
30.000000	21.00	18.6	40.0	19.0
59.158317	13.10	7.0	40.0	26.9
68.877756	15.90	7.2	40.0	24.1
121.362725	21.10	13.2	43.5	22.4
127.194389	22.90	12.9	43.5	20.6
206.893788	17.40	10.9	43.5	26.1
298.256513	25.40	14.7	46.0	20.6
469.318637	22.70	18.9	46.0	23.3
615.110220	26.00	20.9	46.0	20.0
873.647295	34.30	23.3	46.0	11.7


Vertical

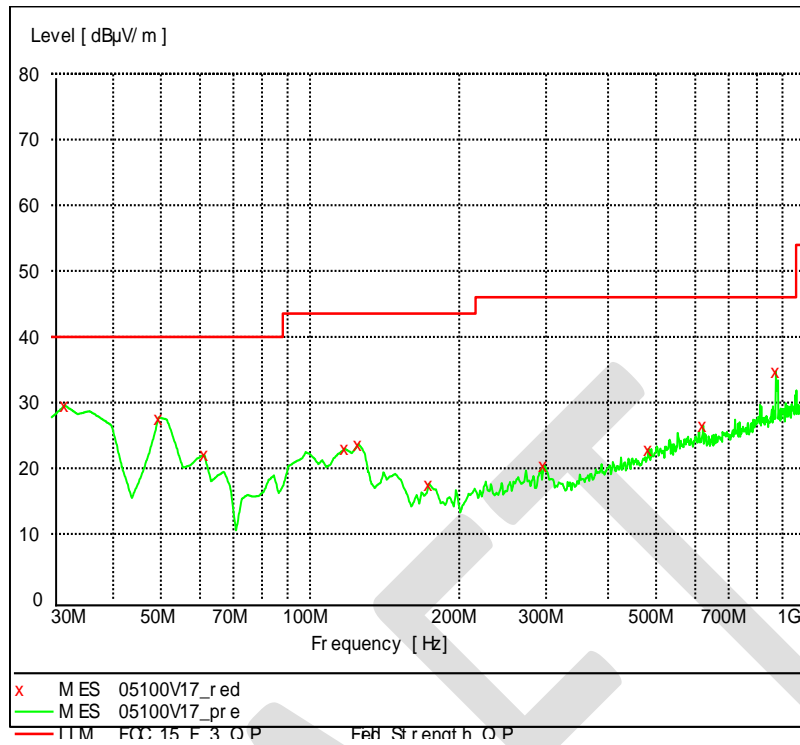

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB
31.943888	29.60	17.5	40.0	10.4
49.438878	27.70	8.8	40.0	12.3
61.102204	22.10	6.9	40.0	17.9
117.474950	23.00	13.1	43.5	20.5
125.250501	23.70	13.0	43.5	19.8
173.847695	17.60	10.7	43.5	25.9
296.312625	20.40	14.7	46.0	25.6
482.925852	22.90	19.2	46.0	23.1
622.885772	26.50	20.9	46.0	19.5
873.647295	34.70	23.3	46.0	11.3


Discharge mode

Horizontal

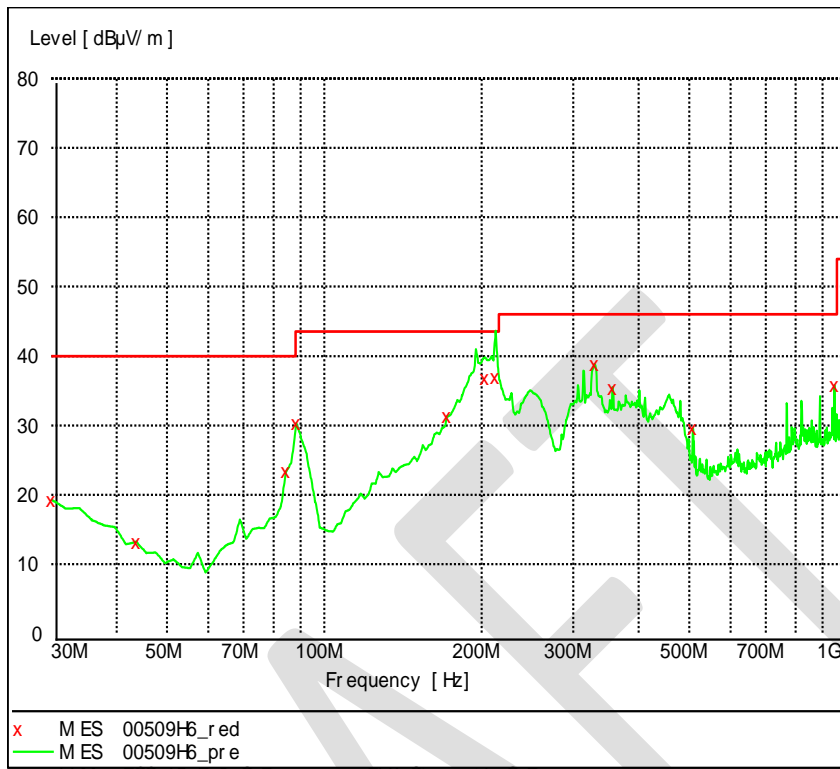

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB
30.000000	19.30	18.6	40.0	20.7
43.607214	13.20	11.5	40.0	26.8
84.428858	23.40	8.7	40.0	16.6
88.316633	30.30	9.5	43.5	13.2
171.903808	31.30	10.7	43.5	12.2
203.006012	36.80	10.8	43.5	6.7
212.725451	37.00	10.8	43.5	6.5
329.358717	38.80	15.6	46.0	7.2
356.573146	35.50	16.4	46.0	10.5
508.196393	29.60	19.6	46.0	16.4
949.458918	35.80	24.0	46.0	10.2

Vertical

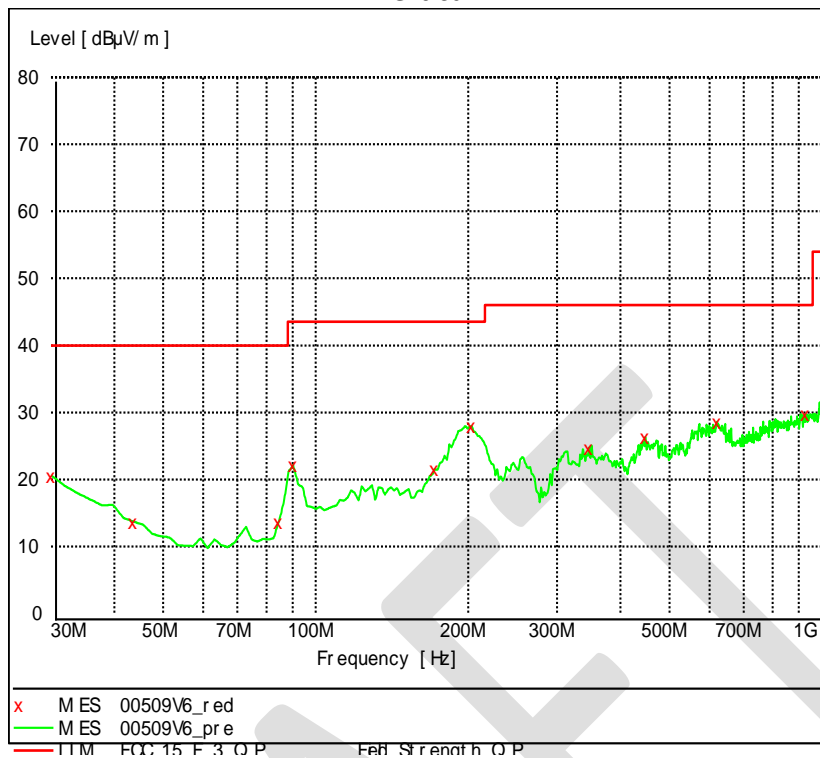


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB
30.000000	20.60	18.6	40.0	19.4
43.607214	13.70	11.5	40.0	26.3
84.428858	13.60	8.7	40.0	26.4
90.260521	22.20	9.9	43.5	21.3
171.903808	21.50	10.7	43.5	22.0
203.006012	28.00	10.9	43.5	15.5
346.853707	24.70	16.1	46.0	21.3
447.935872	26.30	18.5	46.0	19.7
620.941884	28.60	20.9	46.0	17.4
930.020040	29.80	23.8	46.0	16.2

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading = 10dBuV +
 0.20dB/m = 10.20dBuV/m; Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

Appendix I: Photograph of Test setup

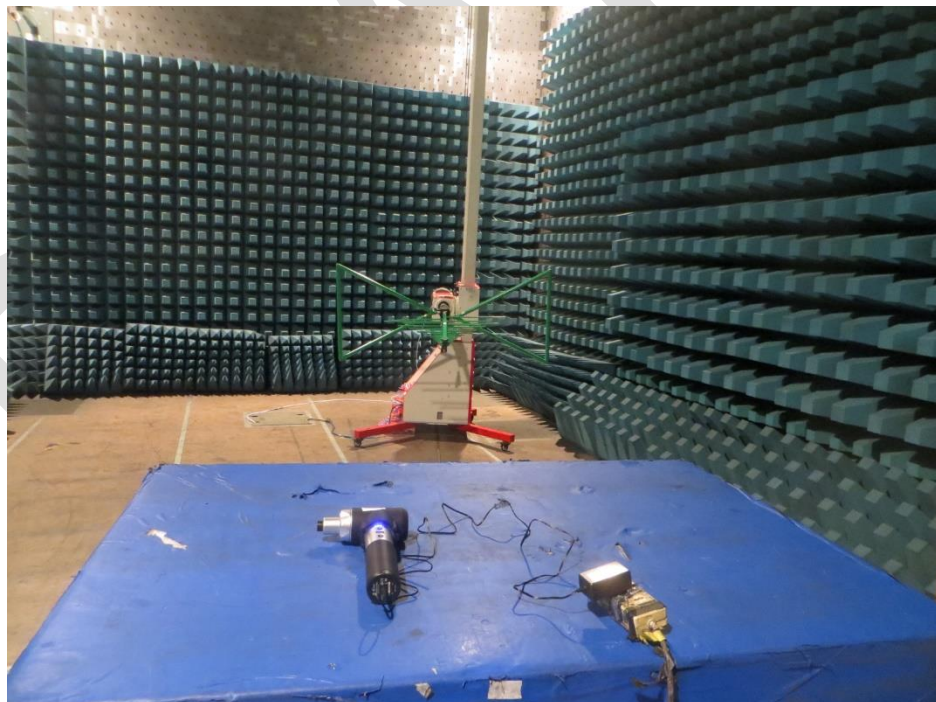

Appendix II: Photograph of equipment under test



*****END of the report*****